

STAINLESS STEEL M2 HIGH SPEED DOORS

CRASH FORGIVING & AUTOMATICALLY RE-INSERTING



STAINLESS STEEL M2
HIGH SPEED DOORS

Designed for interior and exterior use.

*DYNACO is a unique “patented” concept offering:
The safest, fastest, best sealing doors, with the
lowest maintenance cost in the industry.*



STAINLESS STEEL M2 Designed for interior and exterior environments.

Maximum standard dimensions: W 18' x H18'

Designed for interior and exterior environments such as agriculture or food, or for similar industries where a high degree of hygiene, frequent cleaning, excellent sealing and/or corrosive conditions are present.

Resists and operates under pressures up to:

Width (ft.)	UP TO 7'	8'	9'	10'	11'	12'	13'	14'	15'	16'	17'	18'
Pressure (lbs./sq.ft.)	23.89	20.90	18.58	16.72	15.20	13.93	12.86	11.94	11.15	10.45	9.84	9.29
Wind speed* (mph)	95	90	85	80	75	72.5	70	67.5	65	63.5	62	60

*Wind speed is indicative, not including any multiplication coefficients taking into account the configuration of the building.

DESCRIPTION

STANDARD OPERATING SPEED: 48"/sec. Optional speeds up to 96"/sec. upon request depending on door size.

OPERATING TYPE: gear driven, push-pull movement.

SIDE GUIDE made of structural channels or 3 1/8" x 1 5/8" x 0.078" in stainless steel.

INNER SIDE GUIDE in polyethylene (PE-UHMW 1000); outer section 7/8" x 1 9/16", on springs.

SIDE GUIDE COVERS in stainless steel included.

DRUM in stainless steel, diameter 4" x 0.078"; shafts in stainless steel. Shafts and flanges are welded interior and exterior of the drum.

DOOR CURTAIN in reinforced PVC (27 oz/sq.yd). Available in different colors and provided with stainless steel side sealing zippers (section 5/8" x 1/2"); soft bottom edge design.

MOTOR without brake, with 4 poles, controlled by a variable speed drive. Power: 1 HP for a door surface up to 25 sq.yds; 2 HP (larger surface). Protection degree NEMA 4.

MOTOR COVER in stainless steel optional.

GEARBOX size 50 for a motor of 1 HP and gear reduction ratio 1/7; size 63 for 2 HP.

DETECTORS: An infrared photocell installed inside the side guide and detecting the presence of a pedestrian or a vehicle. Upon activation, it opens the door immediately and keeps it open as long as the presence is detected. Height of the photocell: 12" from the floor. (Optional: up to maximum 24" from the floor).


A bottom edge detector opens the door when it hits an obstacle

during the closing cycle. This detector is positioned at the bottom part of the curtain.

POWER SUPPLY: Standard: single phase 208-230 VAC, three phase 208-230 VAC, three phase 460 VAC. Optional: three phase 575 VAC. Frequency: 50-60 Hz. Fuses to be provided by the customer: 10A for a motor of 1HP and 16A for 2HP.

SPACE REQUIREMENTS:

All indicated dimensions are net: the additional space necessary for mounting and maintenance has to be taken into account. Reduced dimensions upon request.

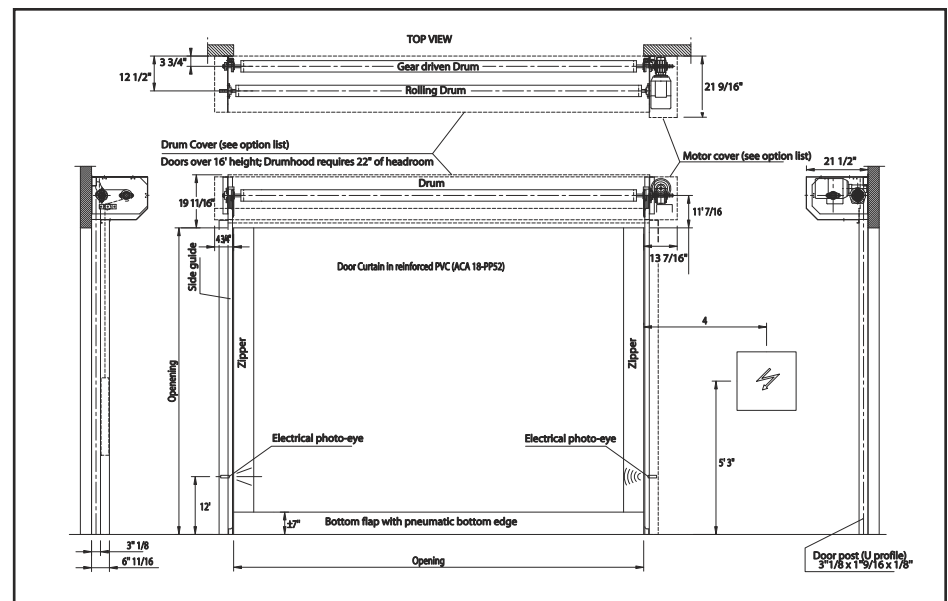

Within the framework of its policy of continuous development of its products, DYNACO reserves the right to modify the characteristics of its products and parts without prior notice.



The Leader in Door Safety and Design